

UWR 200 水下灯



| | | | | | | |
|--------|--------|-----------|--------|--------|--------|-------|
| 24V DC | IP 68 | Class III | Ra>80 | CE | RoHS | Ik 08 |
| PWM | 1-10 V | Dali | 2000 K | 3000 K | 6000 K | RGB |





UWR 200
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc ;
 Temperature of water between -20°C~40°C less than 1 meter depth ;
 Built-in overheat sensor system, Automatic Shutdown at 75°C ;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;
 10 mm step tempered glass enclosure;
 Silicone gasket;
 IP 68 PG-11 copper with nickel-coated;
 Power cable Ho7RN-F 2x1.0 mm² (RGB 4x1.0 mm² / RGBW 5x0.75 mm²), L = 3.0 m;
 Mounting sleeve ABS;
 Options: PWM / 1-10 V / Dali;
 2000 k / 3000 k / 6000 k / RGB / RGBW;
 beam angle;

UWR 200 水下灯
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；
 产品适用不大于 1 米水深、-20°C~40°C 的水温环境；
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；
 10 mm 厚钢化玻璃灯罩；
 硅胶密封圈；
 IP 68 PG-11 电缆锁头，预留 2x1.0 mm² (RGB 4x1.0 mm² / RGBW 5x0.75 mm²) 电缆，长度 3 米；
 ABS预埋件；
 可选项包括: PWM / 1-10 V / Dali;
 2000 k / 3000 k / 6000 k / RGB / RGBW;
 光束角；

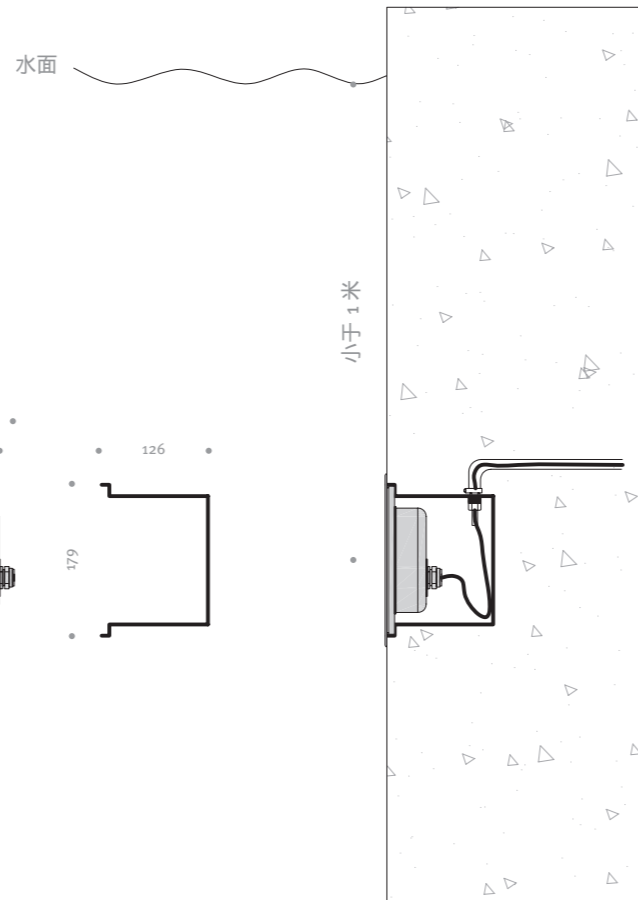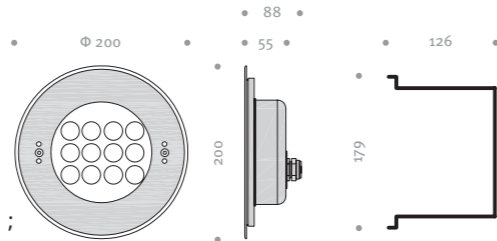

UWR 200 Guide UWR 200 订货指南

| Article No. 产品编号 | Product Name 产品名称 | Description 描述 | Optics 光学系统 | LED Lamps LED 光源 | | |
|---------------------|----------------------|---|----------------|---------------------|--------|--------|
| | | | | 28.8 W | 33.6 W | 34.2 W |
| 9 821 04 01 | UWR 200 | DC 12 V / 24 V 12x2 W 单色 leds 20° 光束角 IP 68 IK 08 | LS-20 | - | - | - |
| 9 821 04 02 | | DC 12 V / 24 V 12x2 W 单色 leds 25° 光束角 IP 68 IK 08 | LS-25 | - | - | - |
| 9 821 04 03 | | DC 12 V / 24 V 12x2 W 单色 leds 30° 光束角 IP 68 IK 08 | LS-30 | - | - | - |
| 9 821 04 04 | | DC 12 V / 24 V 12x2 W 单色 leds 35° 光束角 IP 68 IK 08 | LS-35 | - | - | - |
| 9 821 04 05 | | DC 12 V / 24 V 12x2 W 单色 leds 45° 光束角 IP 68 IK 08 | LS-45 | - | - | - |
| 9 822 04 01 | | DC 12 V / 24 V 12x2 W RGB 三合一 leds 30° 光束角 IP 68 IK 08 | LS-30 | - | - | - |
| 9 823 04 01 | | DC 12 V / 24 V 12x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 08 | LS-30 | - | - | - |
| 9 821 04 11 | | DC 12 V / 24 V 12x2 W 单色 leds 35 / 45° 光束角 IP 68 IK 08 | LA-35 / 45 | - | - | - |
| 1 821 04 01 | Installation sleeve | ABS预埋件，尺寸 Φ 179 mm × 126 mm | | | | |

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购

